

PG CABLE GLAND



PVC Cable Gland Type (PG)


Novo Power PVC Cable Gland Type PG. Protection degree IP68, Working temperature -40 to 100 degree manufactured from high quality material to meet the international standard requirements

Head piece that resistance to high temperature and compression

360° equal clamping range in every point

AG thread that is acceptable DIN norm PG 40430 / Metric EN 60423

%30 glass fiber reinforced lock nut that resistance to high temperature and compression

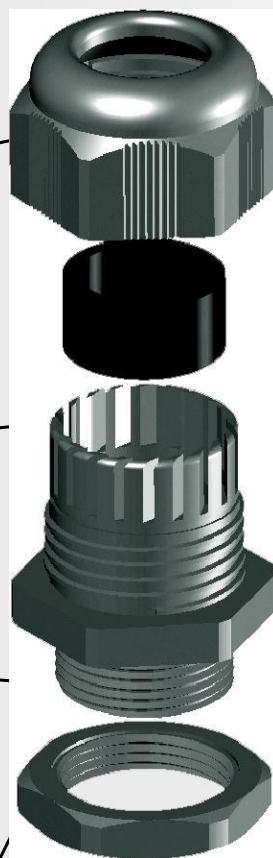



Lock system that prevent slackening in vibrational areas

TPV rubber seal
IP 68
UV

Body part that resistance to high temperature and compression

There is a slickness ground that prevent cable's hung on

Roughing surface that prevent gliding

Cable Gland Size	"H" mm	"GL" mm	 mm	 mm
PG-7	24	8	15	3 – 6.5
PG-9	28	8	19	4 – 8
PG-11	29	8	22	5 – 10
PG-13.5	29	9	24	6 – 12
PG-16	33	9	27	10 – 14
PG-21	38	11	33	13 – 18
PG-29	41	11	42	18 – 25
PG-36	51	13	53	22 – 32
PG-42	53	13	60	30 – 38
PG-48	55	14	65	34 – 44
PG-63	72	15	77	42 – 52